

**Publication number:** EP0883527 (A1)

**Publication date:** 1998-12-16

**Inventor(s):** SCHMID GERHARD [DE]; BAUMGARTNER WALTER [DE];  
KOEPL MICHAEL [DE]; HERMANN STEFAN [DE]

**Applicant(s):** SIEMENS AG [DE]

**Classification:**


- international: B60R21/16; B60R16/02; B60R16/03; B60R21/01; G01P15/00; H04L1/00; H04L29/06; G01P15/00; B60R16/02; B60R16/03; B60R21/01; B60R21/16; H04L1/00; H04L29/06; (IPC1-7): B60R21/32

- **European:** B60R21/017; B60R16/03M

**Application number:** EP19970915313 19970227


**Priority number(s):** WO1997DE00353 19970227; DE19961009079 19960308

**Also published as:**

 EP0883527 (B1)

WO9732758 (A1)

US6229437 (B1)

 US5977653 (A)


 JP11506068 (T)

[more >>](#)

Abstract not available for EP 0883527 (A1)

Abstract of corresponding document: **WO 9732758 (A1)**

A device of this type has a control unit (12) with an encoder (121) for encoding messages (N) and a transmitter (122) for transmitting the coded messages (CN) as signals. A first coded message has a first number of positions and a second coded message has a second number of positions, the first number being smaller than the second. At least one message (N) can be provided with an error-correction code.

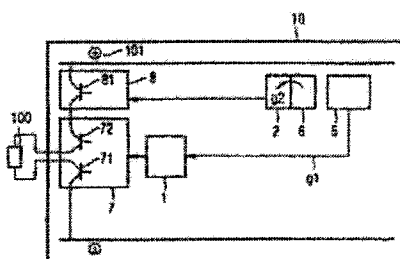

Data supplied from the **esp@cenet** database — Worldwide